





	Page
Tool Cart / Toolwall	596
Modular Tool Panel / Protective Welding Wall	598
Brush / Burner Holder	600
Allen Wrench / Ground Connection	602
Shipping Bracket	604






















# **Tool Cart**

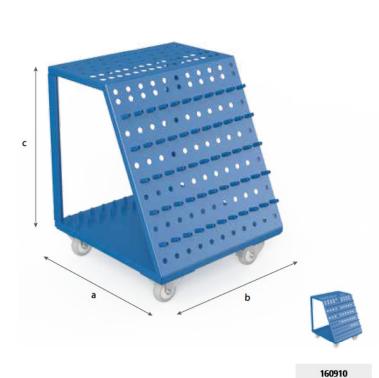






# Description:

Tool Cart, offers sufficient space for your Siegmund accessories. Your tools are handy, and you always keep track of them. Large squares are practically and safely stored in the inside space. Due to the casters, the tools are quickly transported to different points of use.

	Length: (a)	Width: (b)	Height: (c)	Weight:	Item No.
Tool Cart - varnished	560 mm	560 mm	720 mm	30,00 kg	2-160910 •



### Toolwall

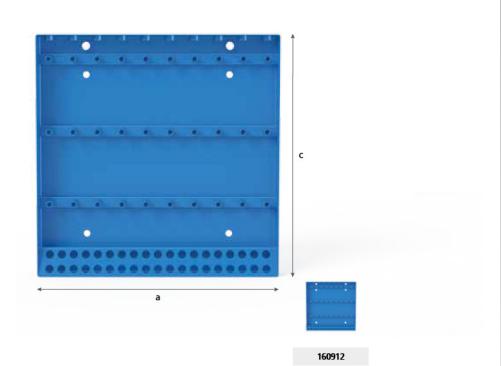

# Description:

With the Toolwall Siegmund accessories are always within reach quickly. It can easily be bolted to the table, and attached to the wall with screws.






	Length: (a)	Width: (b)	Height: (c)	Weight:	Item No.
Toolwall - varnished	500 mm	50 mm	500 mm	7,40 kg	2-160912 •





### **Modular Tool Panel**

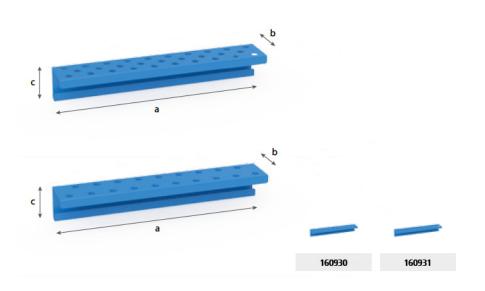

### Description:


Modular Toolwall - create your own personal toolwall by using different components.

The Module 160930 (with System 16 bushing), is suitable for screw clamps, prisms and bolts. The Module 160931 (without bushing) can only be used with prisms and bolts. By using the pin 160936 you can hang up all components with a drill hole of System 16.

The required back board is not included in delivery. We recommend using a glue-laminated wood board with a thickness of at least 5 cm.











	Length: (a)	Width: (b)	Height: (c)	Ø: (o)	Weight:	Item No.
Module for Tool Wall with Sleeves - varnished	500 mm	90 mm	80 mm	16 mm	1,90 kg	2-160930 •
Module for Tool Wall without Sleeves - varnished	500 mm	90 mm	80 mm	16 mm	1,60 kg	2-160931 •
Pin for Toolwall - Burnished - pack of 10	22 mm			16 mm	0,01 kg	2-160936.10 •
Set Module for Tool Wall - consisting of 2x 160930, 2x 160931, 5x 160936.10						2-160930.Set ●

<sup>● =</sup> Stock item / O = Item is made to order

# **Protective Welding Wall**



### Description:

Protective Welding Wall, enables dividing the table into two workspaces. Position and size of workspaces are determined by individual requirements.

The Protective Wall protects workspaces that are located next to each other from welding spatters. The Protective Welding Wall is made of zinc coated sheet and is attached with two holts.

(The Protective Welding Wall is not scratchproof due to production-related reasons).





000520



	Length: (a)	Width: (b)	Height: (c)	Ø: (o)	Weight:	SK:	AM:	ZK:	Item No.
Protective Welding Wall - Custom color varnish available against surcharge	1600 mm	50 mm	800 mm		23,00 kg				2-280980 •
Combination Fast Clamping Bolt 28 -> 16 short - Burnished	75 mm			40 mm	0,32 kg	55,00 kN	10,00 Nm	10,00 kN	2-000520 •


SK=Shearing Force; AM=Tightening Torque; ZK=Tensile Force;

lacktriangle = Stock item / O = Item is made to order





Brush

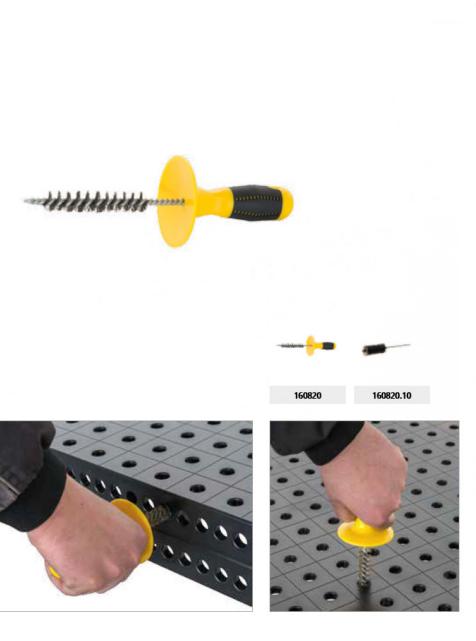

# Description:

Brush with a diameter of 17 mm, especially developed for removing grime in 16 mm bore holes effortlessly.



	Ø: (o)	Weight:	Item No.
Brush Ø 17 with protecting cover - with protecting cover	17 mm	0,05 kg	2-160820 •
Brush Ø 17 for drill bit / 10 piece pack	17 mm	0,05 kg	2-160820.10 •

# **Burner Holder**






160920

# Description:

Burner Holder, can be positioned in each system bore hole and offers an attachment for your welding burner.

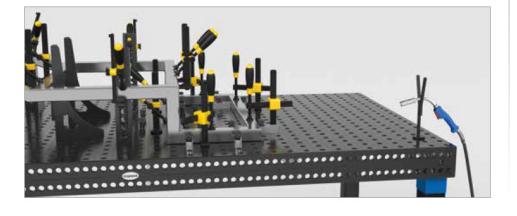




	Height: (c)	Weight:	Item No.
Burner Holder - Burnished	200 mm	0,27 kg	2-160920 •





### Allen Wrench

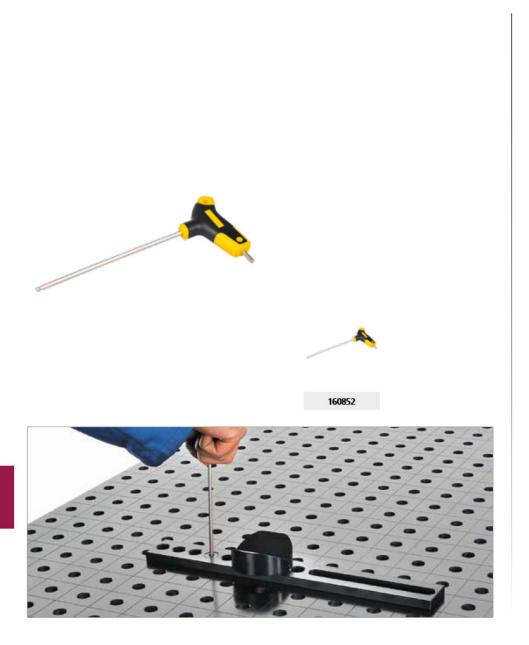

# Description:

Allen Key 4, the practical tool to tighten bolts quickly and safely.

The Allen Key 4 is perfect for clamping of clamping bolts and screw clamps.



### **Ground Connection**

# Description:

Ground Connection, guarantees 100% contact to the welding table, therefore no overheating is possible. Simple installation by fastening it in a system bore hole.

Load up to 500 ampere Cable cross section 70-95 mm<sup>2</sup>





000810







Item No.

# **Ground Connection Comfort**

2-000810 •





### **Shipping Bracket**











### Description:


The Shipping Bracket with fastening plate has a load capacity of 700 kg. It is used to move welding tables and other heavy Siegmund elements safely and easily. It is fastened quickly and simply with four clamping bolts.


The general regulations for the use of shipping brackets must be followed. The load capacity can be reduced substantially, depending on operating conditions. During transport, the table may not be raised more than 100 mm, and no one is permitted underneath the table.


In addition, the shipping brackets can be used as an easy fastener for lashing straps.


Please consider following safety instructions: Ring nuts should be completely bolted. Ring nuts should bear flat and completely on support surface.


Length of mating thread has to be sufficient. Lateral pull should be avoided.













	Length: (a)	Width: (b)	Height: (c)	Weight:	Item No.
Shipping Bracket with Fastening Plate - 700 kg load-bearing capacity (with 4x 160510)	150 mm	100 mm	25 mm	2,63 kg	2-160830 •
Shipping Bracket - 700 kg load-bearing capacity (with 2x 160510) - for work table system 28 and 16	200 mm	100 mm	165 mm	4,50 kg	2-000835 •

● = Stock item / O = Item is made to order

000835

not allowed for 160055 (4000x2000x100 mm)











# **Surface Technology Products Limited**

244-5 Heneage Street.
Birmingham
B7 4LY
United Kingdom

Tel:+ 44 (0) 121 359 4322 Fax +44 (0) 121 359 1817

Email sales@surtech.co.uk